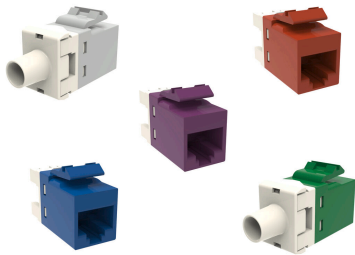


Base Product**SL-Series Modular Jack, RJ45, Cat6 Unshielded****Product Classification**

Regional Availability	Asia Australia/New Zealand EMEA Latin America
Portfolio	NETCONNECT®
Product Type	Modular jack
Product Series	SL Series

General Specifications

ANSI/TIA Category	6
Cable Type	Unshielded
Conductor Type	Solid Stranded
Integrated Dust Cover Type	None
Mounting	SL Series faceplates and panels
Termination Punchdowns, minimum	20 times
Termination Tool	110 Punchdown tool JTT Termination tool
Termination Type	IDC
Transmission Standards	ANSI/TIA-568.2-D ISO/IEC 11801 Class E
Wiring	T568A T568B

Dimensions

Height	16.13 mm 0.635 in
Width	14.48 mm 0.57 in
Depth	30.48 mm 1.2 in

Compatible Cable Diameter, maximum	5.8 mm 0.228 in
Compatible Insulated Conductor Diameter, maximum	1.45 mm 0.057 in
Contact Plating Thickness	1.27 μ m
Compatible Conductor Gauge, solid	22–24 AWG
Compatible Conductor Gauge, stranded	24–26 AWG

Electrical Specifications

Contact Resistance, maximum	20 mOhm
Current Rating at Temperature	1.5 A @ 20 °C 1.5 A @ 68 °F
Dielectric Withstand Voltage, RMS, contact-to-contact	1,000 Vac @ 60 Hz
Insulation Resistance, minimum	500 MOhm
Remote Powering	Fully supports the safe delivery of power over LAN cabling described by IEEE 802.3bt (Type 4) and complies with the unmating under electrical load requirements prescribed by IEC 60512-99-002
PoE Durability	Supports IEEE 802.3bt Type 4 (90 W) applications greater than 3000 plug to jack mating cycles
Safety Voltage Rating	150 Vac

Material Specifications

Contact Base Material	Beryllium copper
Contact Plating Material	Gold
IDC Termination Material	Phosphor Bronze
Material Type	PC+ABS
Termination Contact Plating	Tin

Mechanical Specifications

Plug Retention Force, minimum	50 N 11.24 lbf
Plug to Jack Mating Cycles	Complies to IEC 60603-7 series

Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative Humidity	Up to 95%, non-condensing
Flammability Rating	UL 94 V-0
Safety Standard	cULus